

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**




Eur päisches  
Patentamt

Eur pean  
Patent Office

Office péen  
des brevets

US00/27137

4

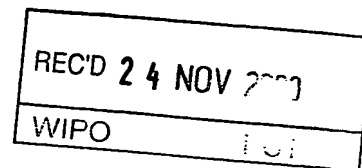

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99120170.8

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE, 02/11/00  
LA HAYE, LE





Eur päisches  
Patentamt

Eur pean  
Patent Office

Office péen  
des brevets

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.: 99120170.8  
Application no.:  
Demande n°:

Anmeldetag: 08/10/99  
Date of filing:  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
THE PROCTER & GAMBLE COMPANY  
Cincinnati, Ohio 45202  
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Adhesives comprising linear, isotactic polymers

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:  
C09J123/10

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:



08-10-1999

1

CM2207/PQ

## ADHESIVES COMPRISING LINEAR, ISOTACTIC POLYMERS

5

Valery Dyatlov  
Bernhard Hanke  
Bernhard Rieger

10

### FIELD OF THE INVENTION

The present invention relates to adhesives used for example in assembling articles. Specifically, the present invention relates to elastic adhesives.

### BACKGROUND

Adhesives and in particular adhesives comprising olefinic polymers are well known in the art and enjoy widespread usage throughout the industry. Typical areas of application of such adhesive include hygienic articles and in particular disposable absorbent articles, packaging materials, automotive parts, and the like.

Adhesives comprising commonly used polyolefins such as PP, PE, PS, PIB have a number of useful properties. They are bio-compatible and food compatible, chemically stable, inert, non toxic materials. However, most of them have poor mechanical properties including insufficient strength/tear resistance, insufficient stretchability/elasticity and the like.

Several approaches have been proposed in the prior art to provide elastic properties to such adhesives. The most commonly used approach is based on changing the chemical structure of the polymer by introducing hinged joints/moieties into the main chain of the polymer. These hinges provide more

flexibility to the polymeric backbone preventing crystallization of polymer, lowering the glass transition temperature (Tg) and improving the elasticity of the resulting material. Usually, the hinge groups contain heteroatoms providing flexibility such as oxygen, nitrogen or chlorine placed into the main chain or into bulky side groups. Another approach is mastication of the polymer by blending with special plasticizing agents. Both approaches, however, require heteroatoms to be introduced into the molecule or into the bulk of the coating material.

10

The third approach proposed in the prior art to provide elastic properties to such adhesives, which is more close to the present invention, is to exploit the formation of hetero-phases which reinforce the bulk material by forming a physical net. To do this the block-co-polymerization of two or more different monomers has been used leading to polymeric backbones comprising blocks with different Tg. This results in micro-phase separation in the bulk with formation of reinforcing crystalline domains of one co-polymer linked with each other by flexible chains of the second co-polymer.

In essence, conventional adhesives carry a wide variety of inherent disadvantages including but not being limited to insufficient strength/tear resistance, insufficient stretchability/elasticity, not being bio-compatible, not being food compatible, comprising heteroatoms such as chlorine and hence leading to toxic residues when burnt, and the like.

It is an object of the present invention to provide adhesives which overcome the disadvantages of the prior art adhesives.

It is an further object of the present invention to provide articles which comprise elastic adhesives.

It is an further object of the present invention to provide a method for manufacturing adhesive of the present invention.



**SUMMARY OF THE INVENTION**

5 The present invention provides an article comprising a first element and a second element being joined to said first element by means of an adhesive. The article is characterized in that said adhesive comprises linear isotactic polymers having a structure of one or several C<sub>2</sub> to C<sub>20</sub> olefins, the isotacticity of said polymers, due to a statistic distribution of stereoscopic errors in the polymer chain, being within the range of 25% to 60% of [mmmm] pentad concentration with the  
10 proviso that an arbitrary or rather regular sequence of isotactic and atactic blocks is excluded, the polymer having a mean molecular weight M<sub>w</sub> within the range of from 100000 to 800000 g/mol and a glass temperature T<sub>g</sub> of between -50 to +30 °C.

15 The present invention further provides a method for providing the aforementioned adhesive coating comprising a step of applying an adhesive coating selected from the group of hot melt, spray, powder melt, extruded bead, liquid, solvent based, pressure sensitive, and combinations thereof.

**DETAILED DESCRIPTION OF THE INVENTION**

20 The present invention provides adhesives comprising linear isotactic polymers having a structure of one or several C<sub>2</sub> to C<sub>20</sub> olefins. The isotacticity of the polymers, due to a statistic distribution of stereoscopic errors in the polymer chain, is within the range of from 25% to 60% of [mmmm] pentad concentration with the proviso that an arbitrary or rather regular sequence of isotactic and atactic  
25 blocks is excluded. The mean molecular weight M<sub>w</sub> of the polymer is within the range of from 100000 to 800000 g/mol and the glass temperature T<sub>g</sub> is between -50 and +30 °C.

30 These polymers exhibit a semi-crystalline structure. The structure contains lactic amorphous areas of nano-scale-size reinforced with self arranged crystalline domains of nano-crystals. The formation of brittle macro-crystallin material from the polymer is achieved by introducing the defects into th polymeric

backbone. Isolated monomer units with opposite stereo configuration have been used as the defects, i.e. single stereo errors.

5       The polymers and a process for manufacturing such polymers are described in PCT patent application EP99/02379 incorporated herein by reference. A catalyst combination suitable for the preparation of such polymers is described in PCT patent application EP99/02378 incorporated herein by reference. These polymers differ in their elastic-thermoplastic behavior from the state of the art as  
10       represented for example by EP-A- 0 707 016. In particular, the polymers used in manufacturing the adhesives of the present invention have a distinctive rubber-elastic plateau in their tensile-strength curves. The polymers of the present invention are bio-compatible and may be burnt without toxic residues since they contain no heteroatoms such as chlorine.

15       In the prior art, a wide variety of suitable techniques to provide adhesive coatings are known such as applying an adhesive in a form including but not being limited to hot melt, spray, powder melt, extruded bead, liquid, solvent based, pressure sensitive, and combinations thereof. The aforementioned methods for providing adhesive coatings all have specific advantages which are known to the  
20       skilled person. Hence, the skilled person will be able to select a suitable method for providing an adhesive coating of the present invention depending on the specific requirement of the respective application of the adhesive.

      The adhesive according to the present invention may also be used as a construction element in an article. Such articles include but are not limited to toys,  
25       furniture, clothing, shoes, sport equipment, complex constructions such as buildings, cars, household appliances, and the like. Having regard to the specific advantages of the polymers used for the articles of the present invention, it will be readily apparent to the skilled practitioner to apply and to optionally modify the adhesives according to the present invention as construction elements in the  
30       above and similar articles.

The adhesives of the present invention are suitable for joining non-sealable polyolefinic surfaces and for joining wood surfaces.

- 5        The adhesives are suitable for applications where the adhesive need to be stretchable, i.e. where the bonded surfaces of the first element and the second element should be allowed to make small movements relative to each other. For example, the adhesive of the present invention may be used as a binder resin for nonwoven web materials. The adhesive of the present invention will allow for
- 10    further processing of such bonded nonwoven web materials such as for example mechanical activation such as by ring rolling.

The adhesives of the present invention may be ultrasonically activated.

CM2207FQ

### CLAIMS

- 5
1. An article comprising a first element and a second element being joined to said first element by means of an adhesive characterized in that
- 10 said adhesive comprises linear isotactic polymers having a structure of one or several  $C_2$  to  $C_{20}$  olefins, the isotacticity of said polymers, due to a statistic distribution of stereoscopic errors in the polymer chain, being within the range of 25% to 60% of [mmmm] pentad concentration with the proviso that an arbitrary or rather regular sequence of isotactic and atactic blocks is excluded, the polymer having a mean molecular weight  $M_w$  within the range
- 15 of from 100000 to 800000 g/mol and a glass temperature  $T_g$  of between -50 to +30 °C.
2. An article according to Claim 1 wherein said adhesive is stretchable.
- 20 3. An article according to Claim 2 wherein said adhesive is elastically expandable.
4. A polymeric adhesive according to any of the preceding claims wherein said linear, isotactic polymer is polypropylene.
- 25 5. An article comprising according to any of the preceding claims wherein said adhesive is deployed as a construction element.
- 30 6. A method for providing an adhesive coating comprising a step of applying an adhesive coating selected from the group of hot melt, spray, powder melt, extruded bead, liquid, solvent based, pressure sensitive, and combinations

thereof

characterized in that

5 said polymeric material comprises a linear isotactic polymers having a  
structure of one or several  $C_2$  to  $C_{20}$  olefins, the isotacticity of said polymers,  
due to a statistic distribution of stereoscopic errors in the polymer chain,  
being within the range of 25% to 60% of [mmmm] pentad concentration with  
the proviso that an arbitrary or rather regular sequence of isotactic and  
10 atactic blocks is excluded, the polymer having a mean molecular weight  $M_w$   
within the range of from 100000 to 800000 g/mol and a glass temperature  $T_g$   
of between -50 to +30 °C.

**CM2207FQ**

**ABSTRACT**

- 5 The present invention relates to adhesives comprising polymeric material wherein the structure of the polymeric material contains elastic amorphous areas of nano-scale-size reinforced with self arranged crystalline domains of nano-crystals.

08-10-1999

MUENCHEN 04

8-10-99

EP99120170 8

49 6196 894470

+49 89 239 SPEC

# P&G

PROCTER & GAMBLE PATENT DEPARTMENT SCHWALBACH TC

65823 Schwalbach am Taunus  
Germany

Telephone No. : +49 - 6196/893184  
Telefax No. : +49 - 6196/894470

## TELEFAX TRANSMISSION COVER SHEET

---

Message for the Attention of

Company Name and Location      European Patent Office

Telefax Number

From      Sonia Kohol

Date      October 8, 1999

No. of pages (including this one)      15

Subject:      Request for grant of a European  
Patent

**THIS PAGE BLANK (USPTO)**